

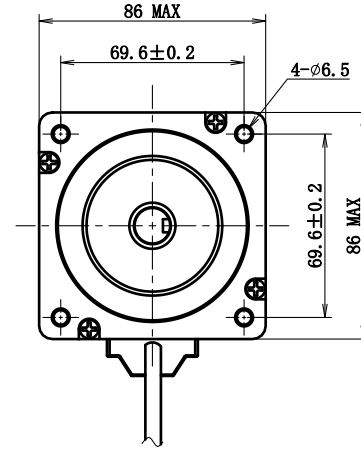
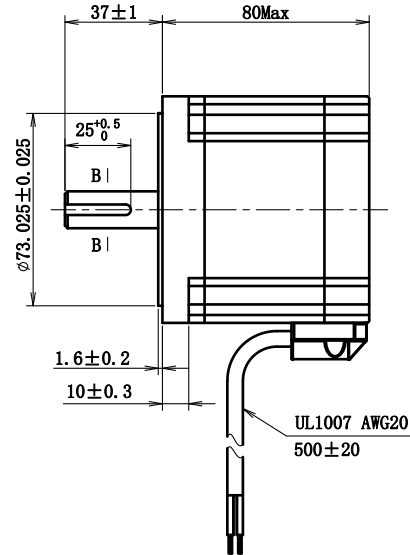


RoHS COMPLAINT



接线图/Wiring Diagram




电器特性参数/ELECTRICAL PARAMETER

步进角 STEP ANGEL	1.8° ±5%
相 数 PHASES	2
额定电压 RATED VOLTAGE	2.925 V
额定电流 RATED CURRENT	4.5 A
电 阻 RESISTANCE	0.65 ohm±0.1 at 20° C
电 感 INDUCTANCE	— mH±20% at 1k Hz, 1Vrms
保持力矩 HOLDING TORQUE	4.5 N.m
运行力矩 (—PPS)	— MIN.
RUNING TORQUR(AT —PPS)	(24V.DC, RATED CURRENT, FULL STEP)
绝缘耐压 DIELECTRIC STRENGTH	500V A.C 1分钟/MINUTE
绝缘电阻 INSULATION RESISTANCE	100 MΩ 以上/MIN.
绝缘等级 INSULATION CLASS	Class B
温度上升 TEMPERATURE RISE	80K MAX.
转子惯量 ROTOR INERTIA	1600 g.cm (2.63oz.in)
重 量 WEIGHT	APPRO. 1000g

励磁顺序(2相励磁)
EXCITING SEQUENCE(TWO PHASE)

STEP	A	B	Ā	B̄	
1	+	+	—	—	CCW ↑
2	—	+	+	—	
3	—	—	+	+	
4	+	—	—	+	

B-B (2:1)



CONFIRMED&ACCEPTED BY COTUMER (客户确认&接受)						型号/MODEL	
COMPANY CHOP&SIGNATURE (盖章&签名)						86BYGH280-4504A-14	
一般公差 TOLERANCE ±0.3/±3°		版本	年 月 日	变更番号	变 更 内 容	设计	备 注 NOTE
设 计/DESIGNED		比例 SCALE	1:2	品 名 TITLE	步进电机规格书 STEPPING MOTOR SPECIFICATION		三视图 THIRD ANGLE PROJECTION
审 核/CHECKED		单位 UNIT	mm	上海四横电机制造有限公司		页 SHEET	1/1